



WiFi Smart Timer & Meter

Operating Instructions

9. Astronomical Function set Sunset time

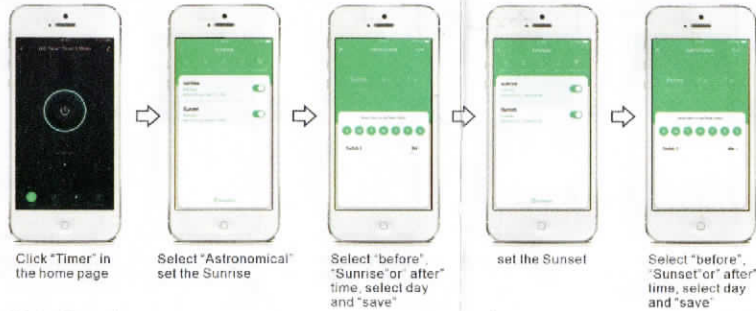


10. Meter Function



In the App can display:
Today Ele (KWh),
Current Ele (mA),
Current Power (W),
Current Voltage (V),
Total Ele (KWh),
Every Month Ele (KWh)

When the measured power is less than 3 W, then the App display of Current Power(W) and Current Ele(mA) are "0", but consumption of electricity accounting into the accumulation.

11. Modify Device Icon

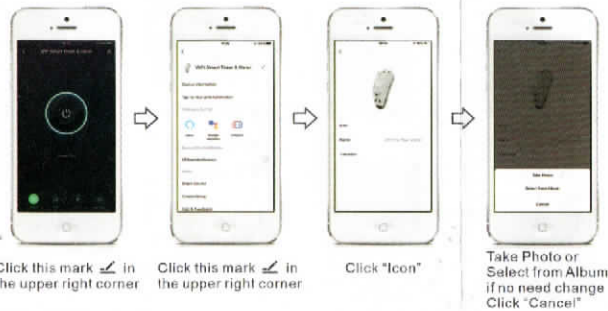


12. Modify Device Name



WiFi Smart Timer & Meter

Operating Instructions

13. Share Device

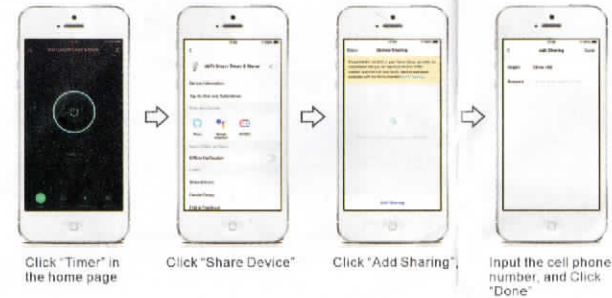


14. Create Group



14. Specification

- Rated Voltage: 100-240VAC 50-60HZ
- Rated Current: 16A 250VAC(Cosφ=1)
- Contact Configuration: 1NO(SPST-NO)
- WiFi Frequency: 2.4GHZ
- Mounting: DIN RAIL 35 mm(EN60715)
- Ambient temperature range: -10°C...+60°C
- Can set 30 ON/OFF programs per day or per week.
- Count down time, from 1 Min to 23 hours 59 Mins.
- If the product is disconnected from the network, the timer retains all programs set up by Mobile App and works according to the set programs.
- With memory function, When the product contact is in the close state, after the power failure, and then call, the product contacts still keep the close state.
- Also can be controlled by tact switch from terminal A1 and A2
- Can be share with 20 users by Mobile App.
- Limit current 16A, if load exceeds 17A, the product will automatically disconnect load circuit

15. Connection Diagrams

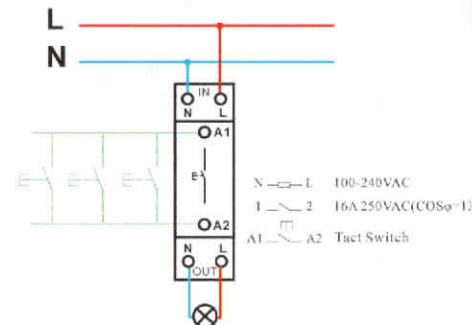

16. Dimensions

